FTR-74G


70 SUPERLOTUS GAS GRDDLE



Gas Fry-top grooved griddle, on open cabinet, plate cm.36x51 (included 1 Head end filler strip mod.TPA-7)



Construction - Fabricated using CrNi 18/10 AISI 304 grade Stainless Steel Scotch-Brite Satin polish Finish, incorporating 2 mm thick worktop, rounded edges, chromed details and rear splash back. Knobs with waterproof grades IPX5. Model - Professional Gas Griddle, Smooth, Ribbed or 50 / 50, Normal or Chrome, on open cabinet. Normal Plate in FE430B Steel and Chrome in FE510C Steel. High durability and rapid heat up. Burners with Piezoelectric ignition and pilot light, 50 - 300degC control, thermostatic and thermocouple safety valves, Removable liquid containers. Maintenance - All serviceable parts are accessible by the easy removal of front control panel. Fittings - Appliance is supplied with both LPG and Natural Gas conversion jets and adjustable feet. Doors not included.













FTR-74G

70 SUPERLOTUS GAS GRDDLE



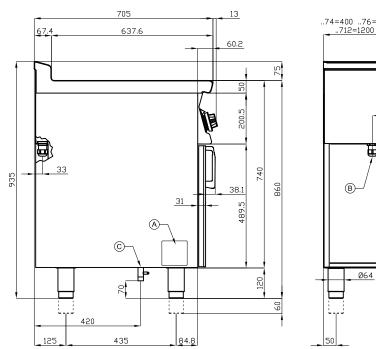



| Α | Data plate | | C | Gas connection | ISO 7-1 1/2" M |
|---|------------|--|---|----------------|----------------|
|---|------------|--|---|----------------|----------------|

MODEL: FTR-74G

DIMENSIONS: cm. 40x 70,5x 90h
GAS POWER: 7 kW / 6.020 kcal/h
GAS TYPE: Natural Gas / LPG



kg: 69 m³: 0.368

mm: 430x770x1110



