FTR-76G


70 SUPERLOTUS GAS GRDDLE



Gas Fry-top grooved griddle, on open cabinet, plate cm.56x51 (included 1 Head end filler strip mod.TPA-7)



Construction - Fabricated using CrNi 18/10 AISI 304 grade Stainless Steel Scotch-Brite Satin polish Finish, incorporating 2 mm thick worktop, rounded edges, chromed details and rear splash back. Knobs with waterproof grades IPX5. Model - Professional Gas Griddle, Smooth, Ribbed or 50 / 50, Normal or Chrome, on open cabinet. Normal Plate in FE430B Steel and Chrome in FE510C Steel. High durability and rapid heat up. Burners with Piezoelectric ignition and pilot light, 50 - 300degC control, thermostatic and thermocouple safety valves, Removable liquid containers. Maintenance - All serviceable parts are accessible by the easy removal of front control panel. Fittings - Appliance is supplied with both LPG and Natural Gas conversion jets and adjustable feet. Doors not included.












FTR-76G

70 SUPERLOTUS GAS GRDDLE



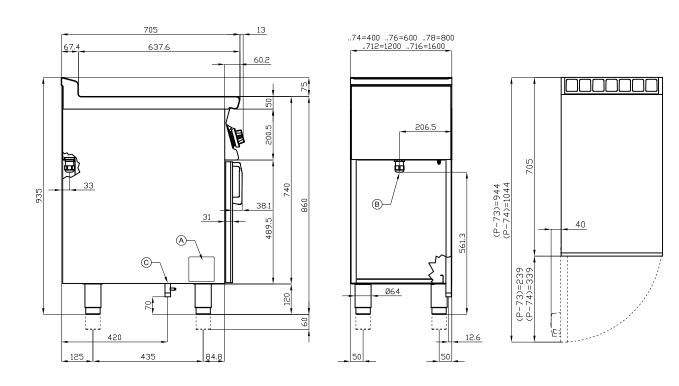

Α	Data plate	C	Gas connection	ISO 7-1 1/2" M

MODEL: FTR-76G

DIMENSIONS: cm. 60x 70,5x 90h

GAS POWER: 10,5 kW / 9.030 kcal/h

GAS TYPE: Natural Gas / LPG



kg: 83 m³: 0.538

mm: 630x770x1110



